


**ONTARIO HYDRO**  
**Pickering, Ontario**

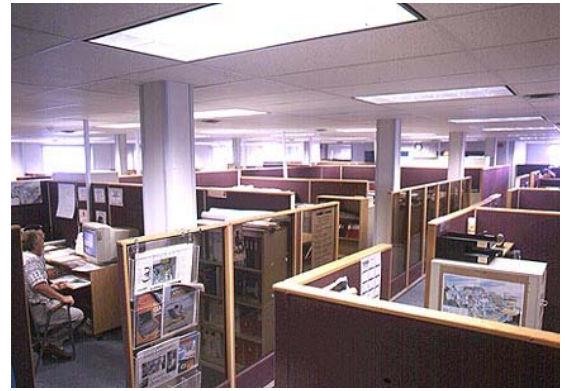

**Record Storage in Record Time!**

In mid October 1995, NRB was challenged to manufacture and deliver a 14,500 square foot, two storey steel and concrete modular building that had a mandatory occupancy date of December 31st, 1995.

On December 4th, 1995, within 6 weeks, NRB began shipping the 13' x 40' building modules (28 in total) to the site for installation.

On December 15th, Hydro began transferring their documents from storage facilities off site into the secure vault, which they used as a Records Management Control Centre, housing all records and management personnel. The sprinklered vault area protects critical files and documents, and features a concrete floor and ceiling assembly with two hour fire rating throughout.

A unique feature of this modular building is its hydraulic elevator. The elevator shaft was structurally designed and prefabricated in the upper and lower modules before being site installed.

This building includes complete electrical, HVAC and plumbing systems, mostly preinstalled at the NRB Plant.

**NRB Modular Buildings. Ready when you are.**

